


## Drawn cup roller bearing BA86-Z-IKO - BA86-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba86-z-iko>

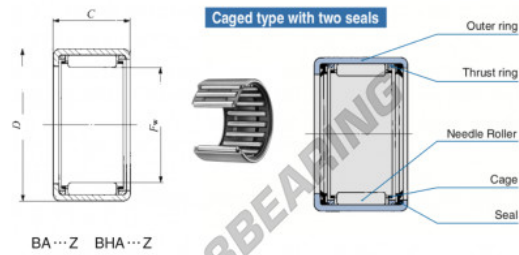

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(I)	Assembled inner ring
<i>P<sub>10</sub></i>	<i>D</i>	<i>C</i>	<i>d<sub>1</sub></i>	<i>d<sub>2</sub></i>	<i>J<sub>1</sub></i>	<i>C</i>	<i>C<sub>0</sub></i>	<i>n</i>	<i>n<sub>1</sub></i>	
			Min.	Max.	Min.	Max.		rpm		
13,708 (0,21)	17,462 (0,68)	9,52 (0,375)	11,112	11,501	17,472	17,454	3470	3850	30000	

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603067
Inside diameter	12.7 mm
Outside diameter	17.462 mm
Thickness	9.52 mm
Limiting speed	30000 rpm
Weight	5 g
Dynamic load	3.47 kN
Static load	3.85 kN
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE