


## Drawn cup roller bearing BA118-Z-IKO - BA118-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba118-z-iko>

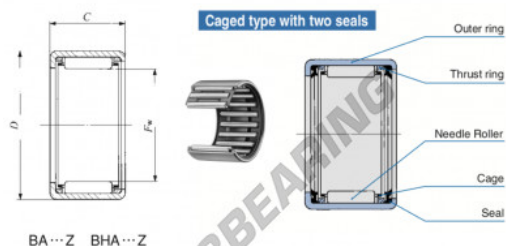

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring		
<i>P<sub>0</sub></i>	<i>D</i>	<i>C</i>	<i>r<sub>1</sub></i>	<i>r<sub>2</sub></i>	<i>r<sub>1</sub></i>	<i>C</i>	<i>C<sub>0</sub></i>	rpm			
17.462 (1116)	22.225 ( 8. 8)	12.726 ( 500)	1.3	17.462	17.451	22.227	22.216	6140	6855	25000	RB 88

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603128
Inside diameter	17.462 mm
Inside diameter	11/16" inch
Outside diameter	22.225 mm
Outside diameter	7/8" inch
Thickness	12.7 mm
Thickness	1/2" inch
Limiting speed	25000 rpm
Dynamic load	6.14 kN
Static load	88.5 kN
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE