


Drawn cup roller bearing BA1112-Z-IKO - BA1112-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba1112-z-iko>

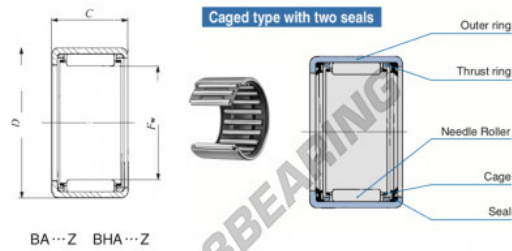

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring	
F_w	D	C	d	d_1	d_2	Housing bore dia.	C	CW	rpm		
	Min.	Min.	Min.	Min.	Max.	Min.	Min.	N	N	rpm	
17.462 (0.688)	22.225 (0.875)	19.05 (0.750)	1.5	17.462	17.451	22.237 (0.876)	22.216 (0.874)	10200	17000	25000	IPB 812

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603142
Inside diameter	17.462 mm
Outside diameter	22.225 mm
Thickness	19.05 mm
Limiting speed	25000 rpm
Dynamic load	10.2 kN
Static load	17 kN
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE