


## Drawn cup roller bearing BA136-Z-IKO - BA136-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba136-z-iko>

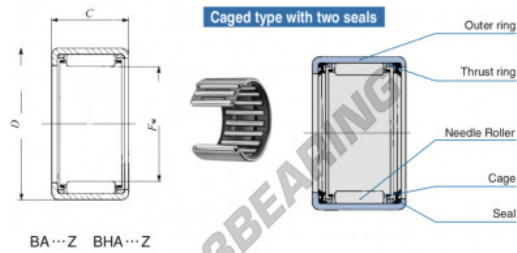

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(I)	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$b_2$	$Z$	Housing bore dia.	$C'$	$C''$	rpm	
20.638 (0.810)	26.988 (1.100)	9.521 (0.375)	Max. 1.2	Max. 20.638	Min. 20.625	Max. 27.500	Min. 26.979	5230	6300	19000

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603210
Inside diameter	20.638 mm
Outside diameter	26.988 mm
Thickness	9.52 mm
Limiting speed	19000 rpm
Dynamic load	5.23 kN
Static load	6.3 kN
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE