


## Drawn cup roller bearing BA1316-Z-IKO - BA1316-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba1316-z-iko>

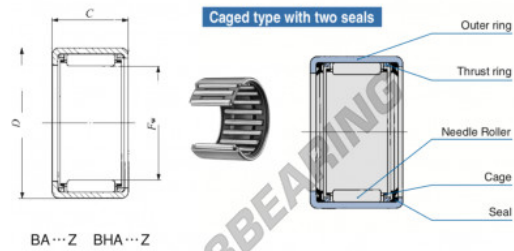

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(U)	Assembled inner ring
$F_w$	D	C	$d_2$	$d_1$	$d_3$	C	C <sub>0</sub>	rpm	
20.638 (0.812)	26.988 (1.062)	25.40 (1.000)	1.3	20.638	20.625	27.000	28.970	16900	28900
				Max.	Min.	Max.	Min.	N	N

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603265
Inside diameter	20.638 mm
Inside diameter	13/16" inch
Outside diameter	26.988 mm
Outside diameter	1 1/16" inch
Thickness	25.4 mm
Thickness	1" inch
Limiting speed	19000 rpm
Dynamic load	16.9 kN
Static load	28.5 kN
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE