


## Drawn cup roller bearing BA1414-Z-IKO - BA1414-Z-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/drawn-cup/ba1414-z-iko>

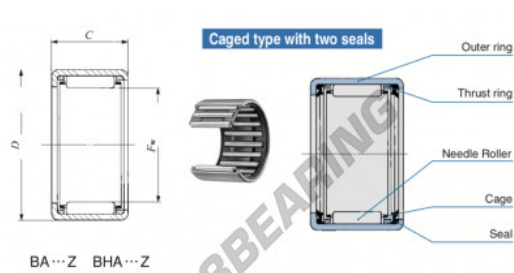

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>1)</sup>	Assembled inner ring	
F <sub>w</sub>	D	C	d	H <sub>6</sub>	H <sub>7</sub>	H <sub>7</sub>	C	C <sub>0</sub>	n	rpm	
22.225 (8.8)	28.575 (1.125)	22.225 (875)	2.0	22.225	22.212	28.587	28.566	15300	20500	18000	RB 1414

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603319
Inside diameter	22.225 mm
Outside diameter	28.575 mm
Thickness	22.22 mm
Limiting speed	18000 rpm
Dynamic load	15.3 kN
Static load	25.5 kN
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE