

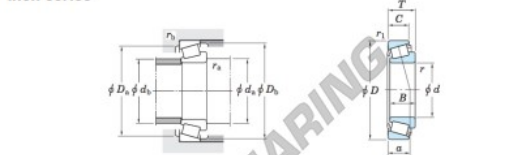
Tapered roller bearing

LM245848-LM245810-JTEKT - LM245848-LM245810-JTEKT

<https://www.123bearing.eu/bearing-housing/roller-bearing/tapered/lm245848-lm245810-jtekt>

Single-row tapered roller bearings
inch series

Koyo

							
Boundary dimensions (mm)							
d	D	T	B	C	r_{max}	r_{min}	
231.775	317.500	47.625	52.388	30.515	3.2	3.2	
Basic load ratings (kN)							
C_0	C_{10}	Limiting speeds (min ⁻¹)					
488	928	Grease lub.		Oil lub.			
		970	1 300				

Bearing No.		Load center (mm) a	Mounting dimensions (mm)						Constant e	Axial load factors		(Refer) Mass (kg)	
Inner ring	Outer ring		d_s	d_b	D_s	D_b	$r_{s \text{ max}}$	$r_{b \text{ max}}$		Y_1	Y_2	Inner ring	Outer ring
LM245848	LM245810	50.5	244.0	240.0	308.0	312.0	3.2	3.2	0.33	1.80	0.99	8.02	2.78

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952431826
Inside diameter	231.775 mm
Outside diameter	317.5 mm
Thickness	47.625 mm
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE