


Roller bearing NCF2930CV-SKF - NCF2930CV-SKF

<https://www.123bearing.eu/bearing-housing/roller-bearing/roller/ncf2930cv-skf>

Dimensions d'encadrement			Charges de base		Vitesses de base		Désignation
d	D	B	dynamique C	statique C ₀	Vitesse de référence n	Vitesse limite	
mm			kN		tr/min		
150	210	36	292	490	1400	1700	NCF 2930 CV

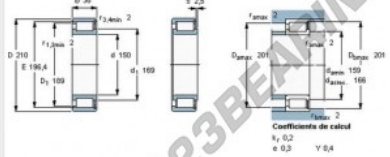

Technical drawing showing dimensions and coefficients for the NCF2930CV roller bearing. Dimensions include: D = 210 mm, d = 150 mm, B = 36 mm, E = 196.4 mm, E₁ = 159 mm, d₁ = 159 mm, r₁ = 2 mm, r₂ = 2 mm, r₃ = 2 mm, r₄ = 2 mm, r₅ = 2 mm, r₆ = 2 mm, r₇ = 2 mm, r₈ = 2 mm, r₉ = 2 mm, r₁₀ = 2 mm, r₁₁ = 2 mm, r₁₂ = 2 mm, r₁₃ = 2 mm, r₁₄ = 2 mm, r₁₅ = 2 mm, r₁₆ = 2 mm, r₁₇ = 2 mm, r₁₈ = 2 mm, r₁₉ = 2 mm, r₂₀ = 2 mm, r₂₁ = 2 mm, r₂₂ = 2 mm, r₂₃ = 2 mm, r₂₄ = 2 mm, r₂₅ = 2 mm, r₂₆ = 2 mm, r₂₇ = 2 mm, r₂₈ = 2 mm, r₂₉ = 2 mm, r₃₀ = 2 mm, r₃₁ = 2 mm, r₃₂ = 2 mm, r₃₃ = 2 mm, r₃₄ = 2 mm, r₃₅ = 2 mm, r₃₆ = 2 mm, r₃₇ = 2 mm, r₃₈ = 2 mm, r₃₉ = 2 mm, r₄₀ = 2 mm, r₄₁ = 2 mm, r₄₂ = 2 mm, r₄₃ = 2 mm, r₄₄ = 2 mm, r₄₅ = 2 mm, r₄₆ = 2 mm, r₄₇ = 2 mm, r₄₈ = 2 mm, r₄₉ = 2 mm, r₅₀ = 2 mm, r₅₁ = 2 mm, r₅₂ = 2 mm, r₅₃ = 2 mm, r₅₄ = 2 mm, r₅₅ = 2 mm, r₅₆ = 2 mm, r₅₇ = 2 mm, r₅₈ = 2 mm, r₅₉ = 2 mm, r₆₀ = 2 mm, r₆₁ = 2 mm, r₆₂ = 2 mm, r₆₃ = 2 mm, r₆₄ = 2 mm, r₆₅ = 2 mm, r₆₆ = 2 mm, r₆₇ = 2 mm, r₆₈ = 2 mm, r₆₉ = 2 mm, r₇₀ = 2 mm, r₇₁ = 2 mm, r₇₂ = 2 mm, r₇₃ = 2 mm, r₇₄ = 2 mm, r₇₅ = 2 mm, r₇₆ = 2 mm, r₇₇ = 2 mm, r₇₈ = 2 mm, r₇₉ = 2 mm, r₈₀ = 2 mm, r₈₁ = 2 mm, r₈₂ = 2 mm, r₈₃ = 2 mm, r₈₄ = 2 mm, r₈₅ = 2 mm, r₈₆ = 2 mm, r₈₇ = 2 mm, r₈₈ = 2 mm, r₈₉ = 2 mm, r₉₀ = 2 mm, r₉₁ = 2 mm, r₉₂ = 2 mm, r₉₃ = 2 mm, r₉₄ = 2 mm, r₉₅ = 2 mm, r₉₆ = 2 mm, r₉₇ = 2 mm, r₉₈ = 2 mm, r₉₉ = 2 mm, r₁₀₀ = 2 mm. Coefficients: e = 0.2, Y = 0.4.

PRODUCT FEATURES

Brand	SKF
N° Ean13	7316572305652
Inside diameter	150 mm
Outside diameter	210 mm
Thickness	36 mm
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE