


## Cam follower CFES12-1-UU-IKO - CFES12-1-UU-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cfes12-1-uu-iko>

**IKO**  
**CAM FOLLOWERS**

Solid Eccentric Stud Type Cam Followers With Cage/With Screwdriver Slot

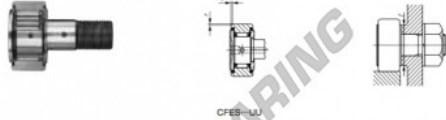

Stud dia. mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			g	D	C	d <sub>1</sub>
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
<b>12</b>						<b>CFES 12-1 UU</b>	105	32	14	12

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N	
G	G <sub>1</sub>	B	B <sub>1</sub> max	B <sub>2</sub> min	B <sub>3</sub>	C <sub>1</sub>	B <sub>1</sub>	B <sub>2</sub>	ε <sub>max</sub>						
M12×1.5	13	15.2	40.2	25	6	0.6	6	3	0.6	0.4	21	21.9	7 910	9 790	9 790

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060459268
Inside diameter	12 mm
Outside diameter	32 mm
Thickness	14 mm
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE