


## Cam follower CF-RU1-16-IKO - CF-RU1-16-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cf-ru1-16-iko>

IKO

### CAM FOLLOWERS

Centralized Lubrication Type Cam Followers With Cage/With Screwdriver Slot

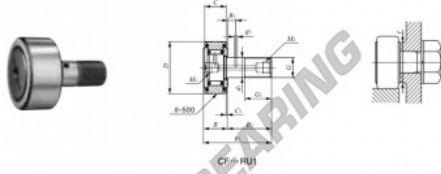

| Stud dia.<br>mm | Identification number      |                                | Mass<br>(Ref.)<br>g | Boundary dimensions mm |    |                |           |                |
|-----------------|----------------------------|--------------------------------|---------------------|------------------------|----|----------------|-----------|----------------|
|                 | With crowned<br>outer ring | With cylindrical<br>outer ring |                     | D                      | C  | d <sub>1</sub> | G         | G <sub>1</sub> |
| 16              | CF-RU1-16                  |                                | 170                 | 35                     | 18 | 16             | M16 x 1.5 | 17             |

| B <sub>max</sub> | B <sub>1max</sub> | B <sub>2</sub> | B <sub>3</sub> | C <sub>1</sub> | g <sub>2</sub> | M <sub>1</sub> | M <sub>2</sub> | f <sub>6</sub> min <sup>(1)</sup> | Mounting<br>dimension<br>f <sub>6</sub><br>Min.<br>mm | Maximum<br>tightening<br>torque<br>N·m | Basic dynamic<br>load rating<br>C<br>N | Basic static<br>load rating<br>C <sub>0</sub><br>N | Maximum<br>allowable<br>static load<br>N |
|------------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------------------|---|--|--|--|--|
| 19.6             | 52.1              | 32.5           | 8              | 0.8            | 3              | PT<br>1/8      | PT<br>1/8      | 0.6                               | 26  | 58.5                                   | 12 000                                 | 18 300   | 18 300                                   |

## PRODUCT FEATURES

|                  |               |
|------------------|---------------|
| Brand            | IKO           |
| N° Ean13         | 3616060461636 |
| Inside diameter  | 16 mm         |
| Outside diameter | 35 mm         |
| Thickness        | 18 mm         |
| Weight           | 170 g         |
| Packaging        | 1             |

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE