


Tapered roller bearing 420-414-JTEKT - 420-414-JTEKT

<https://www.123bearing.eu/bearing-housing/roller-bearing/tapered/420-414-jtekt>

Single-row tapered roller bearings
inch series

Koyo

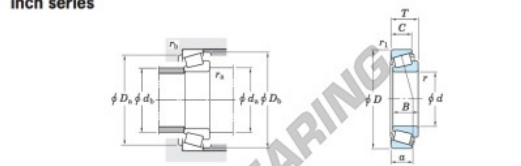

Boundary dimensions (mm)							Basic load ratings (kN)		Limiting speeds (min ⁻¹)	
d	D	T	B	C	r_{max}	r_{min}	C_r	C_{10}	Grease lub.	Oil lub.
40.000	88.501	26.988	29.083	22.225	3.6	1.6	98.2	112	4 900	6 500

Bearing No.		Load center (mm)	Mounting dimensions (mm)						Constant	Axial load factors		(Refer.) Mass (kg)	
Inner ring	Outer ring	a	d_s	d_b	D_s	D_b	$r_{s \text{ max}}$	$r_{b \text{ max}}$	e	Y_1	Y_2	Inner ring	Outer ring
420	414	16.9	52.0	46.0	77.0	80.0	3.6	1.6	0.26	2.28	1.25	0.465	0.325

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952426792
Inside diameter	40 mm
Inside diameter	1.575" inch
Outside diameter	88.501 mm
Outside diameter	3.484" inch
Thickness	26.988 mm
Thickness	1 1/16" inch
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE