


Tapered roller bearing 45292-JTEKT - 45292-JTEKT

<https://www.123bearing.eu/bearing-housing/roller-bearing/tapered/45292-jtekt>

Double-row tapered roller bearings
TDI type Koyo

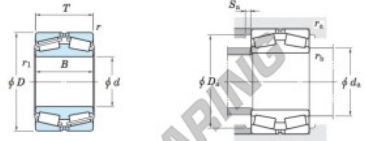

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min ⁻¹)	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> _{max.}	<i>r</i> _{1 min.}	<i>C</i> _r	<i>C</i> _{0r}	Grease lub.	Oil lub.
460	680	163	163	6	6	3 000	5 660	280	370

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d</i> _a max.	<i>D</i> _a max.	<i>D</i> _a min.	<i>S</i> _a min.	<i>r</i> _a max.	<i>r</i> _b max.		<i>Y</i> ₂	<i>Y</i> ₃	<i>Y</i> ₀	
45292	510	652	616	6	5	5	0.39	1.74	2.59	1.70	197

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952482187
Inside diameter	460 mm
Outside diameter	680 mm
Thickness	163 mm
Weight	197000 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE