


Needle roller bearing NAF355017-IKO - NAF355017-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/needle/naf355017-iko>

IKO
NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE
With Inner Ring

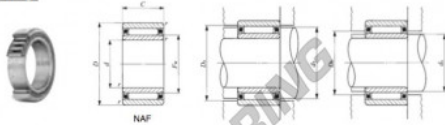

Shaft dia. mm	Identification number	Mess (Ref.) g	Boundary dimensions, mm					Standard mounting dimensions, mm				
			d	D	C	r_s (1)	F_w	d_b	D_s Max.	d_4 Min.	D_b Max.	
35	NAF 355017	115	35	50	17	0.3	40	43.5	48	37	39	40.8
Basic dynamic load rating C	Basic static load rating C_0	Allowable rotational speed (2)	Assembled roller ring									
N	N	rpm	LRT 354017									
22 200	42 700	12 000										

Notes: (1) Minimum allowable value of chamfer dimension r .
(2) Allowable rotational speed applies to grease lubrication.
Remark: The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952384634
Inside diameter	30 mm
Inside diameter	1.181" inch
Outside diameter	55 mm
Outside diameter	2.165" inch
Thickness	17 mm
Thickness	0.669" inch
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE