


## Yoke type track roller CRY26-VUU-IKO - CRY26-VUU-IKO

<https://www.123bearing.eu/bearing-housing/roller-bearing/yoke-track-roller/cry26-vuu-iko>

**IKO**  
**ROLLER FOLLOWERS**  
Non-separable Roller Followers, Inch Series **Full Complement Type /With Inner Ring**

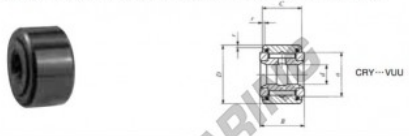

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions: mm(inch)									
	Shield type Cylindrical outer ring	Sealed type Cylindrical outer ring		d	D	B	C						
<b>11.112</b> ( $\frac{1}{2}$ )	<b>CRY 26 VUU</b>		227	11.112 ( $\frac{5}{8}$ )	41.275 ( $1\frac{3}{4}$ )	23.813(0.9375)	22.225 ( $\frac{7}{8}$ )						
				Shaft dia.				Basic dynamic load rating C	Basic static load rating C <sub>0</sub>				
				Push fit		Drive fit		Press fit					
				Min.	Max.	Min.	Max.	Min.	Max.				
				28.8(1.134)	1.588 ( $\frac{1}{16}$ )	11.095	11.105	11.110	11.120	11.115	11.125	28 200	40 100

Remarks: 1. The inner ring has an oil hole.  
2. Provided with prepacked grease.

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952398143
Inside diameter	11.112 mm
Outside diameter	41.275 mm
Thickness	23.813 mm
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE