


Cam follower CF4-FBR-IKO - CF4-FBR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cf4-fbr-iko>

IKO

CAM FOLLOWERS

Stainless Steel Made Cam Followers With Cage/With Hexagon Hole

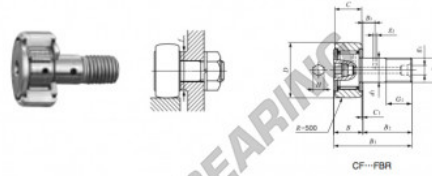

| Stud dia. mm | Identification number | | | | Mass (Ref.) | D | C | d ₁ | G | G ₁ | |
|-----------------|----------------------------|--------------------------------|---------------------------|--------------------------------|----------------|----|---|----------------|---------|----------------|---|
| | Shield type | | Sealed type | | | | | | | | |
| | With crowned outer ring | With cylindrical outer ring | With ribbed outer ring | With cylindrical outer ring | g | B | 4 | M | 4 × 0.7 | 6 | |
| 4 | CF | 4 | FBR | | 7.4 | 12 | B | 4 | M | 4 × 0.7 | 6 |

| Boundary dimensions mm | | | | | | | | Mounting dimension f Min. mm | Maximum tightening torque N·m | Basic dynamic load rating C N | Basic static load rating C ₀ N | Maximum allowable static load N | |
|------------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----|--|--|--|--|--|-----|
| B | B ₁ | B ₂ | B ₃ | C ₁ | g ₁ | g ₂ | H | | | | | | |
| 9 | 20 | 11 | — | 0.5 | — | — | 2.5 | 0.3 | 8.3 | 0.78 | 1 650 | 1 270 | 834 |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3663952439884 |
| Inside diameter | 4 mm |
| Outside diameter | 12 mm |
| Thickness | 8 mm |
| Packaging | 1 |

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE