


Cam follower CFES10-1-R-IKO - CFES10-1-R-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cfes10-1-r-iko>

IKO

CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Screwdriver Slot

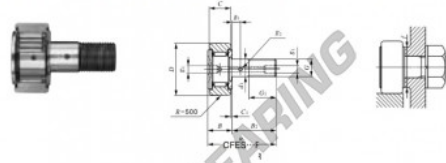

Stud dia. mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d ₁
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
10	CFES 10-1 R				60	26	12	10

Boundary dimensions mm										Eccentricity E	Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
G	G ₁	B	B ₁ max	B ₂ max	B ₃	C ₁	B ₁	B ₂	B ₃						
M10×1.25	12	13.2	36.2	23	—	0.6	*4	—	0.3	0.3	16	13.8	5 430	6 890	6 890

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060459169
Inside diameter	10 mm
Outside diameter	26 mm
Thickness	12 mm
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE