


## Cam follower CR10-UUR-IKO - CR10-UUR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/cr10-uur-iko>

IKO

### CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

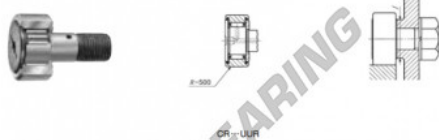

Stud dia. mm (inch)	Identification number				g	D	C	d <sub>1</sub>	G UNF	G <sub>1</sub>
	Shield type With covered outer ring	Shield type With cylindrical outer ring	Sealed type With covered outer ring	Sealed type With cylindrical outer ring						
<b>6.350</b> ( $\frac{1}{4}$ )			<b>CR 10</b>	<b>UUR</b>	19	15.875 $\frac{5}{8}$	10.319 $\frac{13}{32}$	6.350 $\frac{1}{4}$	$\frac{1}{4}$ -28	7.938 $\frac{5}{16}$
Boundary dimensions mm(inch)										
B max	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	S <sub>1</sub>	S <sub>2</sub>	r	Bearing dimension f Min. mm(inch)	Maximum tightening torque C N·m	Basic dynamic load rating C <sub>0</sub> N	Basic static load rating C <sub>0</sub> N
11.8148	15.875 $\frac{5}{8}$	- (-)	0.794 $\frac{1}{16}$	3.175 $\frac{1}{8}$	- (-)	0.397 $\frac{1}{64}$	11.509 $\frac{9}{16}$	3.4	9 890	3 670

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060462800
Inside diameter	6.35 mm
Inside diameter	1/4" inch
Outside diameter	15.875 mm
Outside diameter	5/8" inch
Thickness	10.319 mm
Thickness	13/32" inch
Weight	19 g
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE