


Cam follower CRH12-VB-IKO - CRH12-VB-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/crh12-vb-iko>

IKO

CAM FOLLOWERS

Inch Series Heavy Duty Cam Followers Full Complement Type/With Hexagon Hole

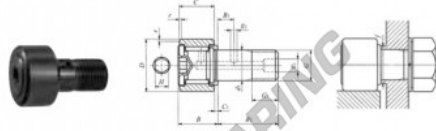

Stud dia. mm (inch)	Identification number		Mass (Ref.) g	D	C	d ₁	G UNF	G ₁	B max
	Shield type	Sealed type							
11.112 ($\frac{7}{16}$)	CRH 12	VB	39	19.050 ($\frac{3}{4}$)	12.700 ($\frac{1}{2}$)	11.112 ($\frac{7}{16}$)	$\frac{7}{16}$ -20	8.525 ($\frac{3}{4}$)	14.6 (0.57)

Boundary dimensions mm(inch)								Mounting dimension F Min. mm(inch)	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N
B ₂	B ₃	C ₁	S ₁	S ₂	H	R					
22.225 ($\frac{7}{8}$)	6.350 ($\frac{1}{4}$)	0.794 ($\frac{1}{16}$)	4.762 ($\frac{3}{16}$)	2.381 ($\frac{3}{32}$)	4.762 ($\frac{3}{16}$)	0.794 ($\frac{1}{16}$)	12.484 ($\frac{1}{2}$)	17.6	8 710	12 300	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060464439
Inside diameter	11.112 mm
Outside diameter	19.05 mm
Thickness	12.7 mm
Weight	39 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE