


Cam follower CRH14-VR-IKO - CRH14-VR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/crh14-vr-iko>

IKO

CAM FOLLOWERS

Inch Series Heavy Duty Cam Followers Full Complement Type/With Screwdriver Slot

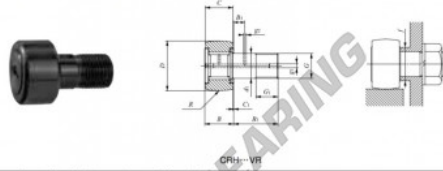

Stud dia. mm (inch)	Identification number		Mass (Ref.) g	mm (inch)						
	Shield type	Sealed type		D	C	d ₁	C UNF	G ₁	B max	
11.112 ($\frac{7}{16}$)	CRH 14 VR		49	22.225 ($\frac{7}{8}$)	12.700 ($\frac{1}{2}$)	11.112 ($\frac{7}{16}$)	$\frac{1}{8}$ -20	9.525 ($\frac{3}{8}$)	14.6 (0.57)	
Boundary dimensions				Mounting dimension		Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N		
B ₂	B ₃	C ₁	S ₁	S ₂	R				f Min. mm (inch)	
22.225 ($\frac{7}{8}$)	6.350 ($\frac{1}{4}$)	0.794 ($\frac{1}{16}$)	4.762 ($\frac{3}{16}$)	2.381 ($\frac{1}{8}$)	250 (3)	13.484 ($\frac{1}{2}$)	17.8	8 710	12 300	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952463056
Inside diameter	11.112 mm
Outside diameter	22.225 mm
Thickness	12.7 mm
Weight	49 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE