


Cam follower CRH32-VR-IKO - CRH32-VR-IKO

<https://www.123bearing.eu/bearing-housing/deep-groove-bearing/cam-follower/crh32-vr-iko>

IKO

CAM FOLLOWERS

Inch Series Heavy Duty Cam Followers Full Complement Type/With Screwdriver Slot

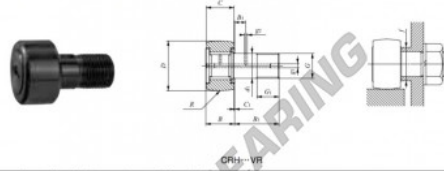

Stud dia. mm (inch)	Identification number		Mass (Ref.) g	Dimensions						
	Shield type	Sealed type		D	C	d_1	G UNF	G_1	B max	
28.575 (1.125)	CRH 32	VR	722	50.800 (2)	31.750 (1.25)	28.575 (1.125)	D_1 -12	25.400 (1)	34.2 (1.35)	

Boundary dimensions mm(inch)							Mounting dimension f Min. mm(inch)	Maximum tightening torque N-m	Basic dynamic load rating C N	Basic static load rating C_0 N
B_2	B_3	C_1	S_1	S_2	R					
50.800 (2)	12.700 (0.5)	1.588 (0.0625)	4.762 (0.1875)	3.175 (0.125)	600 (24)	37.306 (1.47)	356	45 700	80 600	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952463797
Inside diameter	28.575 mm
Outside diameter	50.8 mm
Thickness	31.75 mm
Weight	722 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE