


Axial needle roller AZK15283.5-IKO - AZK15283.5-IKO

<https://www.123bearing.eu/bearing-housing/needle-roller-bearing/axial-needle/azk15283.5-iko>

IKO

THRUST BEARINGS

Thrust Roller Bearings

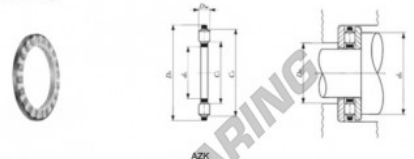

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
15	AZ 15289	28	AZK 15283.5	9.4	WS 1528	GS 1528	9.3	

Boundary dimensions mm										Standard mounting dimension mm	Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	
d	D	T	d _c	D _c	D _w	B	r _s ⁽¹⁾	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
15	28	9	15.04	27.8	3.5	2.75	0.3	17	25	25	18	10 200	23 900	14 000

Notes: ⁽¹⁾ Minimum allowable value of chamfer dimension r
⁽²⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952486833
Inside diameter	15 mm
Outside diameter	28 mm
Thickness	3.5 mm
Weight	9.4 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE