


TAPR Rod end GIHR-K25-DO-DURBAL - GIHR-K25-DO-DURBAL

<https://www.123bearing.eu/bearing-housing/rod-end/tapr/gihr-k25-do-durbal>

GIHR-K25-DO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE...ES pressed into rod end housing. Sliding combination steel / steel, with grease nipple.

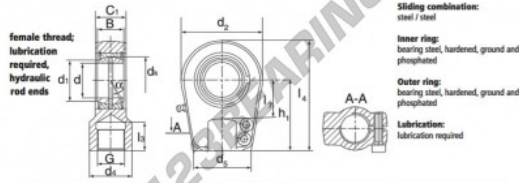

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and phosphated
Outer ring:
bearing steel, hardened, ground and phosphated
Lubrication:
lubrication required

order number	d	d ₁	G	d ₂	d ₃	B	C ₁	d ₂
GIHR-K 25 DO	25	29,3	M 16 x 1,5	25	46	20	23	56

type	l ₁ min	l ₂ min	h	l ₄	d ₄	α [°]	load rating C ₀ [N]	weight [kg]
GIHR-K / GIHL-K 25 DO	17	28	50	80,0	35,5	7	72	0,48

PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952499031
Inside diameter	25 mm
Inside diameter	0.984" inch
Outside diameter	56 mm
Outside diameter	2.205" inch
Thickness	23 mm
Thickness	0.906" inch
Type	TAPR
Weight	480 g
Thread	Right-hand thread
Lubrication	with
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE