

# TAPR Rod end GIHN-KL-80LO-DURBAL - GIHN-KL-80LO-DURBAL


<https://www.123bearing.eu/bearing-housing/rod-end/tapr/gihn-kl-80lo-durbal>

## GIHN-KL-80LO



**Description:** Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

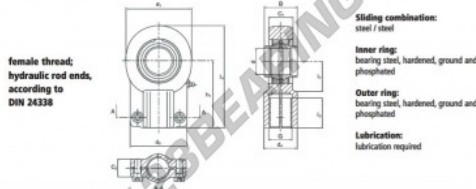

female thread;  
hydraulic rod ends,  
according to  
DIN 24338

Sliding combination:

steel / steel

Inner ring:  
bearing steel, hardened, ground and  
phosphated

Outer ring:  
bearing steel, hardened, ground and  
phosphated

Lubrication:  
lubrication required

order number		measurement [mm]							
right hand thread	left hand thread	d	d <sub>1</sub>	G	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>	
	<b>GIHN-KL 80 LO</b>	80	168	M 64 x 3	90,0	148	80	66	48
type		l <sub>1</sub> min	h	l <sub>2</sub>	l <sub>1</sub>	load rating C <sub>0</sub> [kN]	weight [kg]		
GIHN-K /	<b>GIHN-KL 80 LO</b>	86	180	270,0	78	695,0	14,50		

## PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952500409
Inside diameter	80 mm
Outside diameter	168 mm
Thickness	66 mm
Type	TAPR
Weight	14500 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE