


**TPN Rod end**  
**GK50-DO-DURBAL - GK50-DO-DURBAL**  
<https://www.123bearing.eu/bearing-housing/rod-end/tpn/gk50-do-durbal>

**GK50-DO**



**Description:** DIN ISO Hydraulic rod end with welding slope and dowel pin at the end of rod. Made of spherical plain bearing DGE... ES (ES-2RS) pressed into rod end housing. Sliding combination steel / steel.  
Type DGK...DO-2RS with two additional seals available on request with grease nipple.

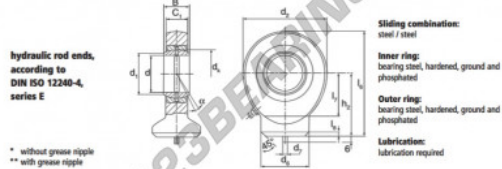

hydraulic rod ends, according to DIN ISO 12240-4, series E

\* without grease nipple  
\*\* with grease nipple

**Sliding combination:** steel / steel  
**Inner ring:** bearing steel, hardened, ground and phosphated  
**Outer ring:** bearing steel, hardened, ground and phosphated  
**Lubrication:** lubrication required

order number	d	d <sub>1</sub>	d <sub>2</sub>	measurement [mm]			B	C <sub>1</sub>
<b>GK 50 DO</b>	50	55,9	112	6	62,0	35	30	

type	h <sub>1</sub>	h <sub>2</sub>	measurement [mm]		D	d <sub>1</sub>	α [°]	load rating C <sub>0</sub> [kN]	weight [kg]
<b>GK 50 DO</b>	88	144,0	59,0	4,0	75	66,0	6	250,0	2,500

**PRODUCT FEATURES**

Brand	DURBAL
N° Ean13	3663952501482
Inside diameter	50 mm
Outside diameter	112 mm
Thickness	35 mm
Type	TPN
Weight	2500 g
Lubrication	with
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)  
+33 359 36 04 90  
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE