


Tapered roller bearing 46220A-JTEKT - 46220A-JTEKT

<https://www.123bearing.eu/bearing-housing/roller-bearing/tapered/46220a-jtekt>

Double-row tapered roller bearings
TDO type

Koyo

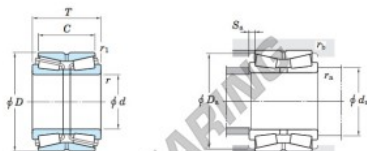

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min ⁻¹)	
d	D	T	C	r_1 min.	r_2 min.	C_r	C_{0r}	Grease lub.	Oil lub.
100	150	46	37	2	0.6	180	293	1 900	2 500

Bearing No.	Mounting dimensions (mm)					Constant e	Axial load factors			Refer.) Mass (kg)
	d_a min.	D_a min.	S_a min.	r_a max.	r_b max.		Y_2	Y_3	Y_0	
46220A	110	142	4.5	2	0.6	0.35	1.95	2.90	1.91	2.53

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250133022
Inside diameter	100 mm
Outside diameter	150 mm
Thickness	37 mm
2nd Thickness	46 mm
Weight	2530 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE