


Tapered roller bearing 46228-JTEKT - 46228-JTEKT

<https://www.123bearing.eu/bearing-housing/roller-bearing/tapered/46228-jtekt>

Double-row tapered roller bearings ——— **Koyo**
TDO type

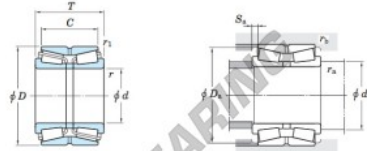

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min ⁻¹)	
d	D	T	C	r_1 min.	r_2 min.	C_r	C_{0r}	Grease lub.	Oil lub.
140	210	53	47	2.5	0.6	239	404	1300	1800

Bearing No.	Mounting dimensions (mm)					Constant e	Axial load factors			Refer.) Mass (kg)
	d_a min.	D_a min.	S_a min.	r_a max.	r_b max.		Y_2	Y_3	Y_0	
46228	152	196	3	2	0.6	0.33	2.03	3.02	1.98	5.85

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250133107
Inside diameter	140 mm
Outside diameter	210 mm
Thickness	47 mm
2nd Thickness	53 mm
Weight	5850 g
Packaging	1

contact@123bearing.eu

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE