


## Tapered roller bearing 45338-JTEKT - 45338-JTEKT

<https://www.123bearing.eu/bearing-housing/roller-bearing/tapered/45338-jtekt>

Double-row tapered roller bearings TDI type Koyo

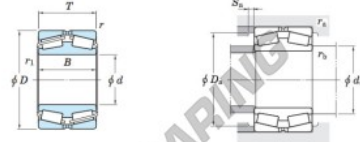

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
d	D	B	T	r	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.
190	320	104	104	3	981	1 590	840	1 100

Bearing No.	Mounting dimensions (mm)					Constant e	Axial load factors			(Refer.) Mass (kg)	
	d <sub>a</sub> max.	D <sub>a</sub> max.	S <sub>a</sub> min.	r <sub>a</sub> max.	r <sub>b</sub> max.		Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>0</sub>		
45338	224	306	280	5	2.5	3	0.35	1.95	2.90	1.91	34.0

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952481906
Inside diameter	190 mm
Outside diameter	320 mm
Thickness	104 mm
Weight	34000 g
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE