


## Tapered roller bearing 45280-JTEKT - 45280-JTEKT

<https://www.123bearing.eu/bearing-housing/roller-bearing/tapered/45280-jtekt>

Double-row tapered roller bearings **Koyo**  
TDI type

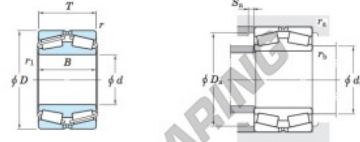

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
d	D	B	T	r	r <sub>1</sub>	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.
400	600	148	148	5	6	2 410	4 960	340	450

Bearing No.	Mounting dimensions (mm)					Constant e	Axial load factors			(Refer.) Mass (kg)	
	d <sub>a</sub> max.	D <sub>a</sub> max.	S <sub>a</sub> min.	r <sub>a</sub> max.	r <sub>b</sub> max.		Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>0</sub>		
45280	452	578	545	6	4	5	0.33	2.03	3.02	1.98	143

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250130519
Inside diameter	400 mm
Outside diameter	600 mm
Thickness	148 mm
Weight	143000 g
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE