


## Tapered roller bearing 45384-JTEKT - 45384-JTEKT

<https://www.123bearing.eu/bearing-housing/roller-bearing/tapered/45384-jtekt>

Double-row tapered roller bearings  
TDI type Koyo

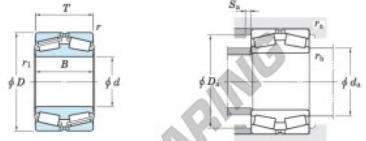

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> min.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Grease lub.	Oil lub.
420	700	224	224	6	6	4 710	8 380	280	380

Bearing No.	Mounting dimensions (mm)					Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)	
	<i>d<sub>a</sub></i> max.	<i>D<sub>a</sub></i> max.	<i>D<sub>a</sub></i> min.	<i>S<sub>a</sub></i> min.	<i>r<sub>a</sub></i> max.		<i>Y<sub>2</sub></i>	<i>Y<sub>3</sub></i>	<i>Y<sub>0</sub></i>		
45384	488	672	623	7	5	5	0.39	1.74	2.59	1.70	352

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952482156
Inside diameter	420 mm
Outside diameter	700 mm
Thickness	224 mm
Weight	352000 g
Packaging	1

[contact@123bearing.eu](mailto:contact@123bearing.eu)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE